

Fig. 1

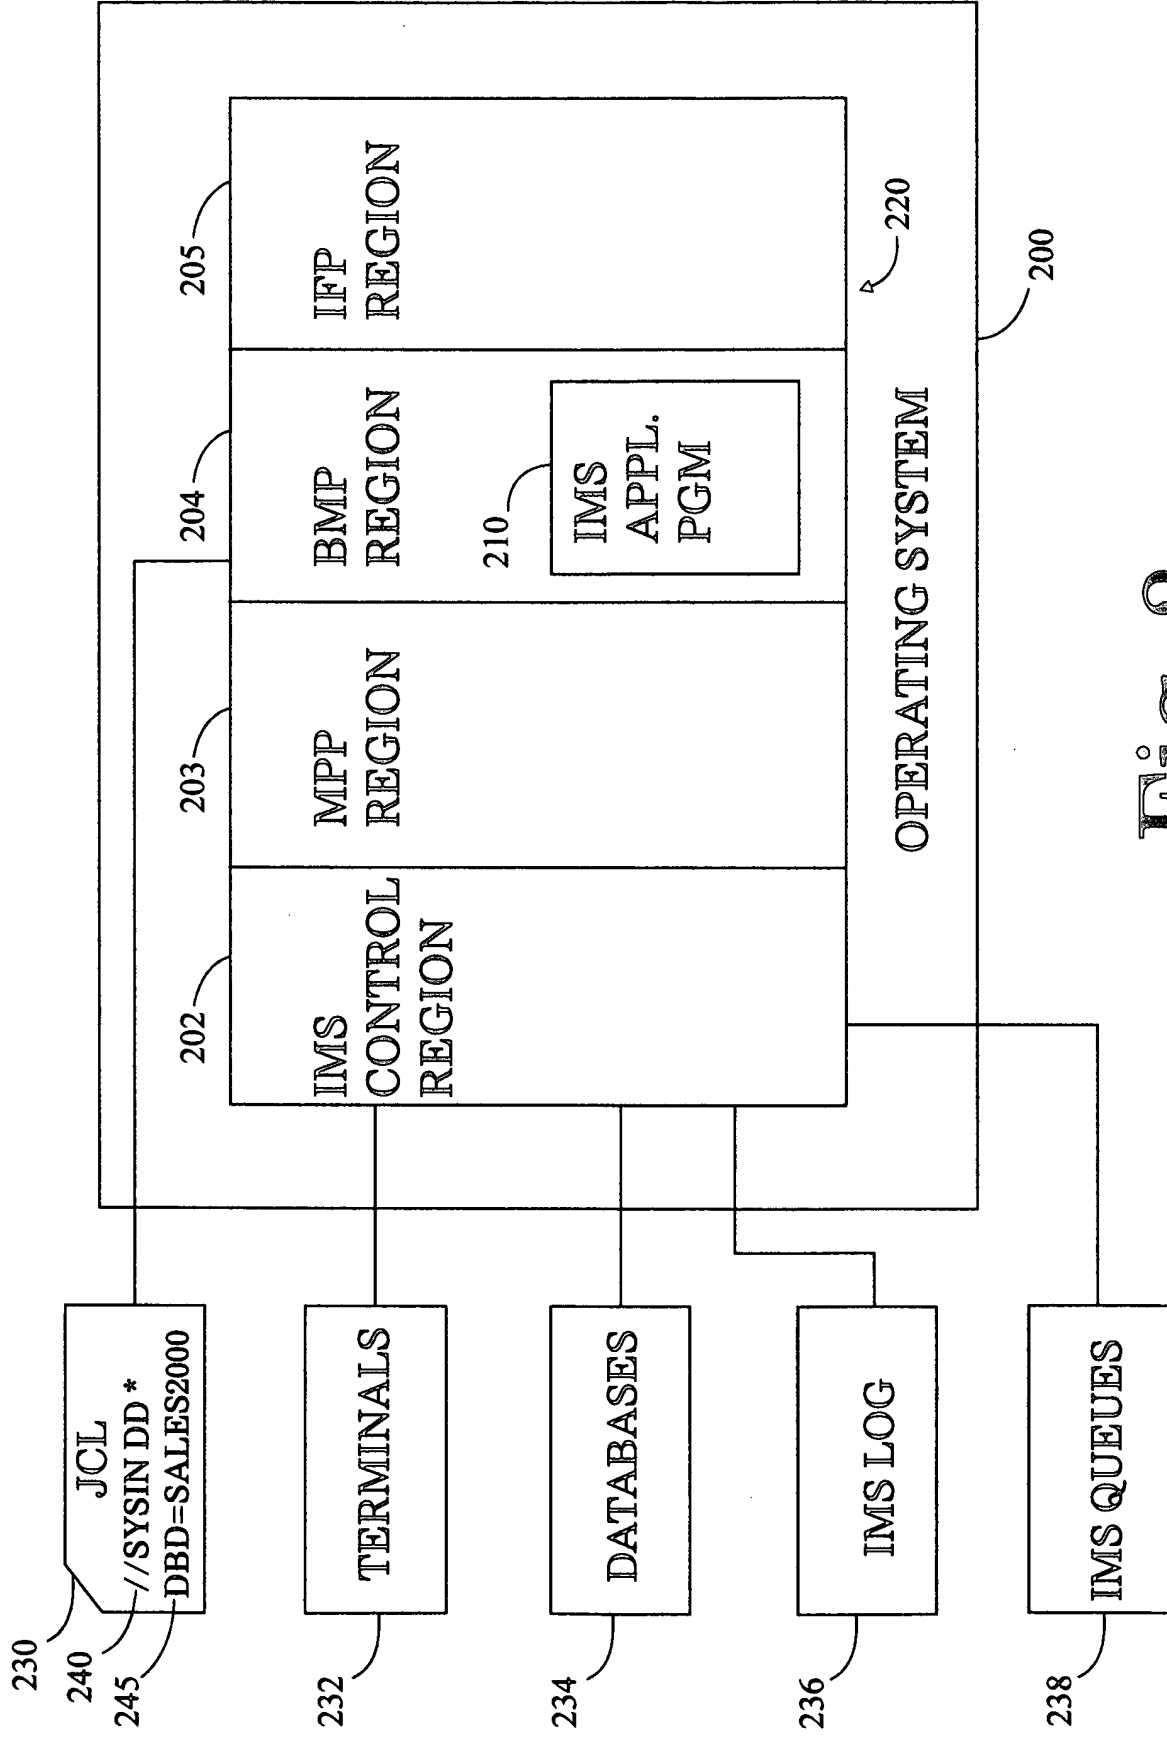


Fig. 2

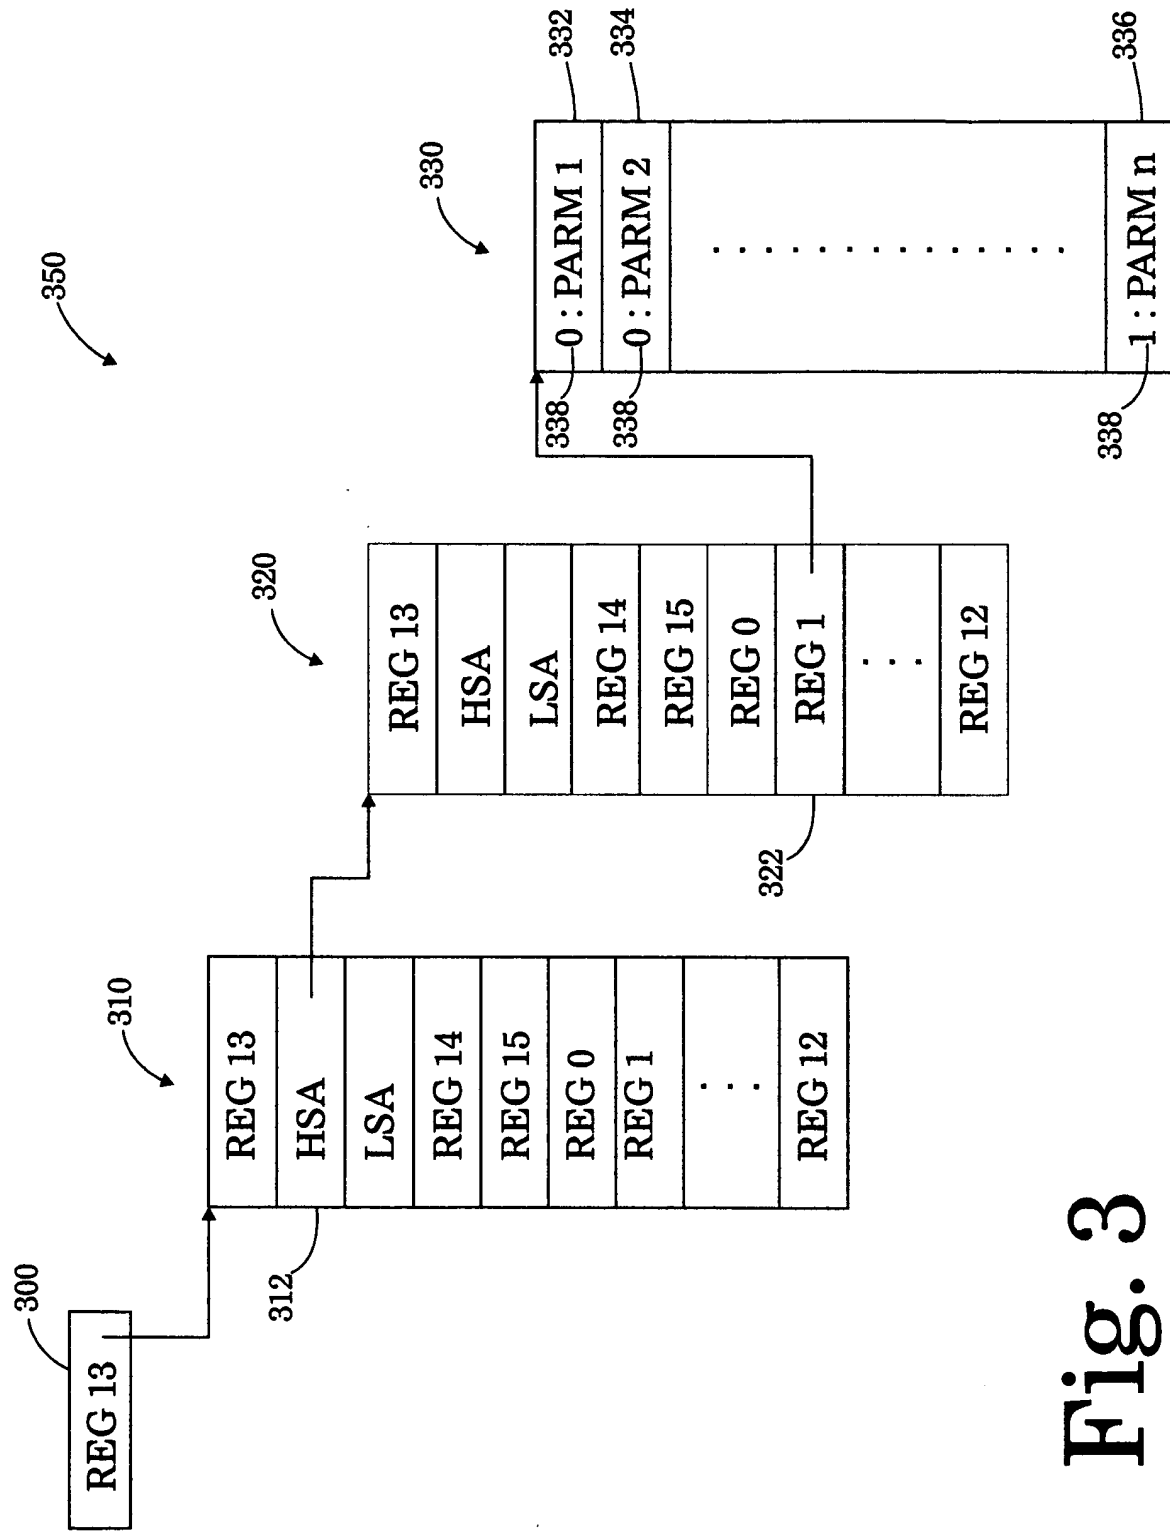


Fig. 3

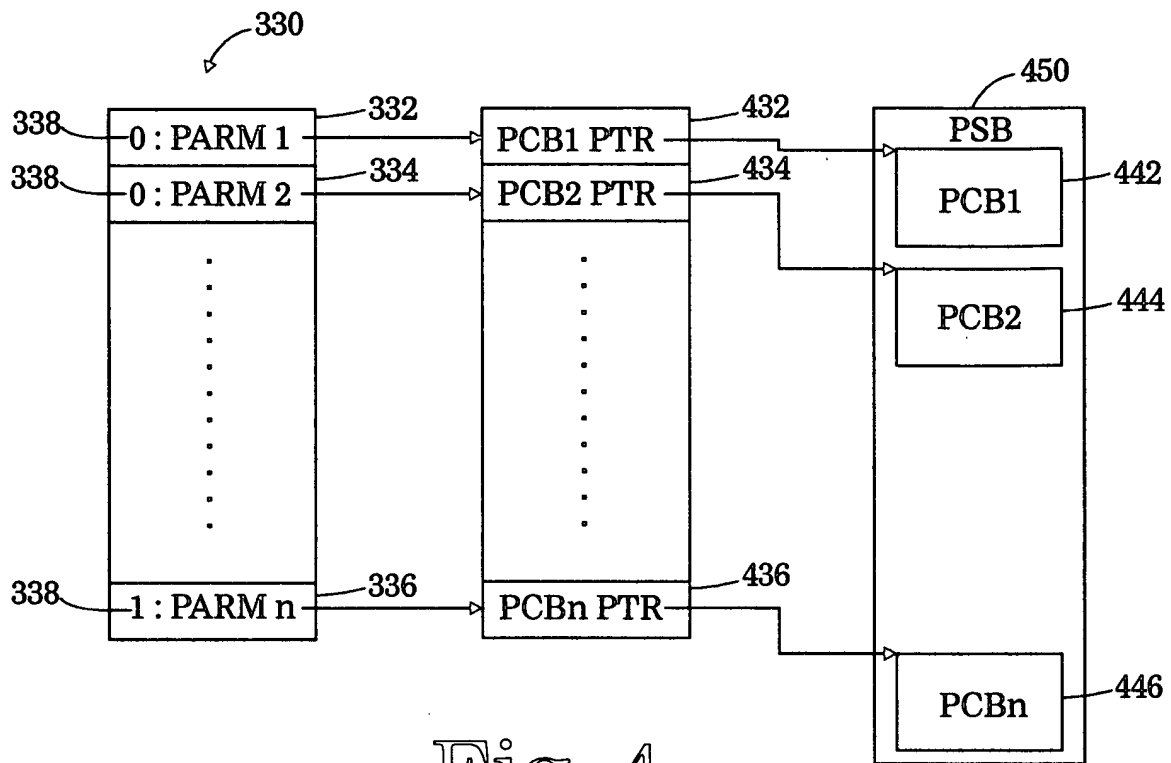


Fig. 4

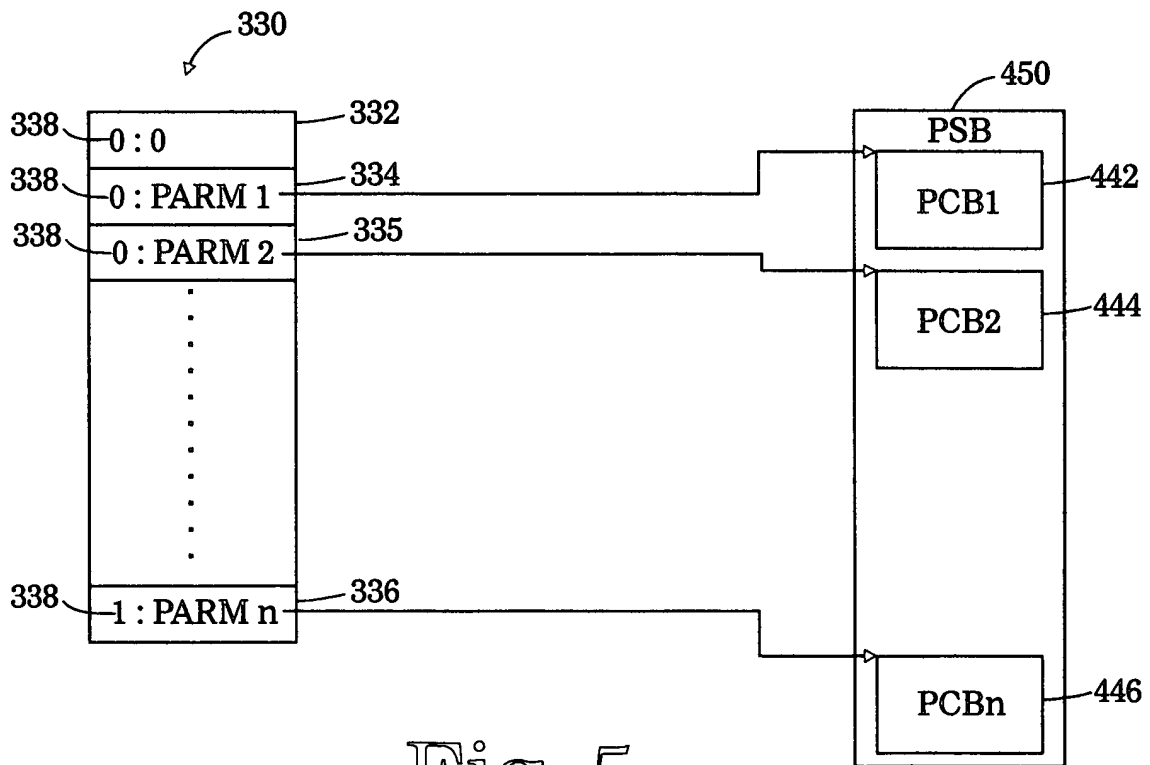


Fig. 5

FIG. 6

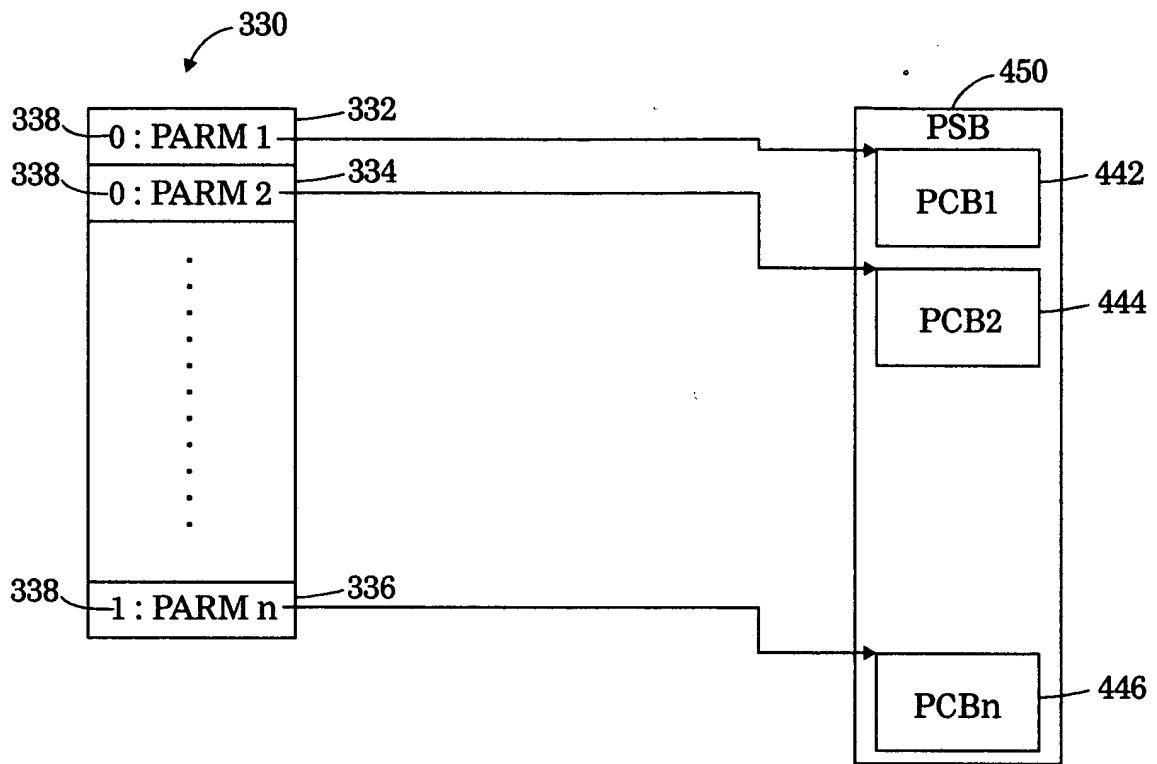


Fig. 6

500

DCL DBPTR POINTER;  
DCL 1 DBPCB BASED(DBPTR),

502—2 NAME CHAR(8),  
2 SEGLEVEL CHAR(2),  
2 STAT CHAR(2),  
2 PROCOPT CHAR(4),  
2 RESERV BIN(31),  
2 SEGNAME CHAR(8),  
2 KFB\_LEN BIN(31),  
2 SENSEG BIN(31),  
2 KEYFBA CHAR(255);

Fig. 7

550

DCL IOPTR POINTER;  
DCL 1 IOPCB BASED(IOPTR),

552—2 NAME CHAR(8),  
2 RESV BIN(15),  
2 STAT CHAR(2),  
2 LDTE CHAR(8),  
2 PREFIX BIN(31),  
2 MODN CHAR(8),  
554—2 USER CHAR(8),  
2 SENSEG BIN(31),  
2 GROUP CHAR(8);

Fig. 8

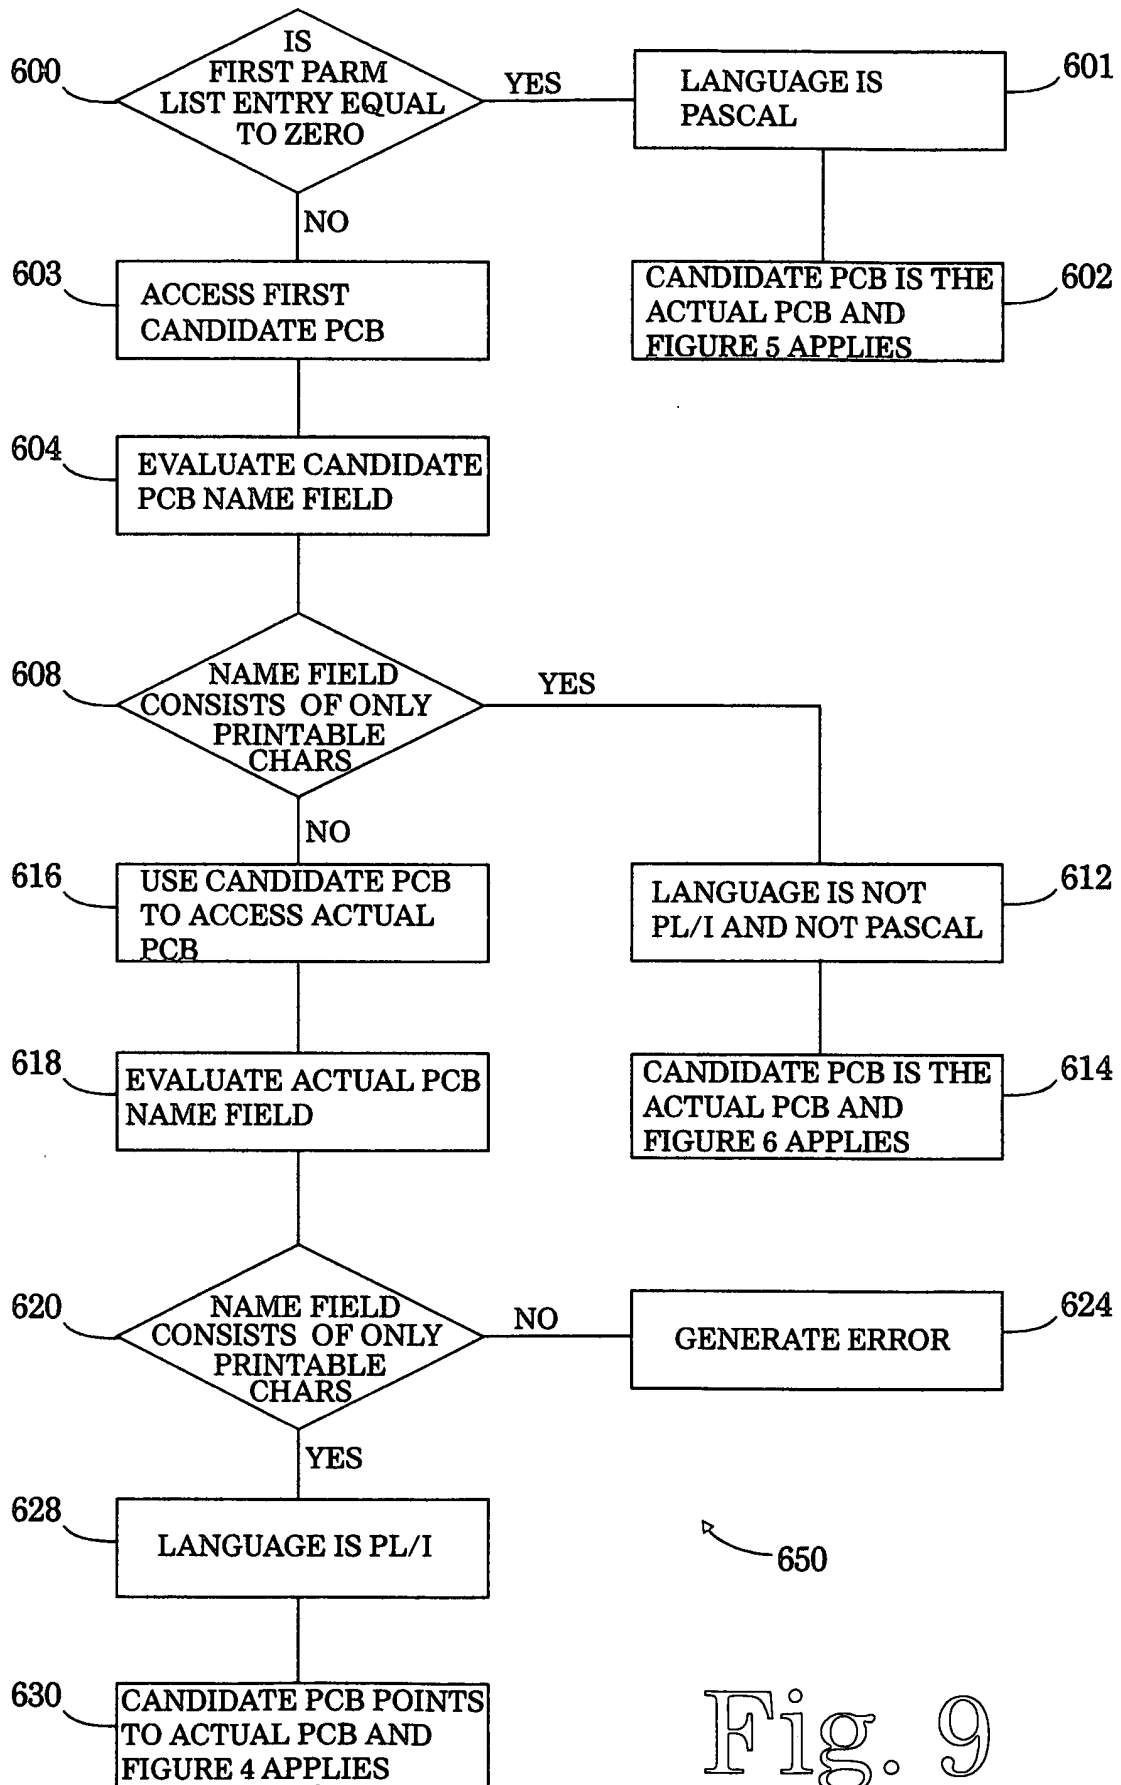


Fig. 9

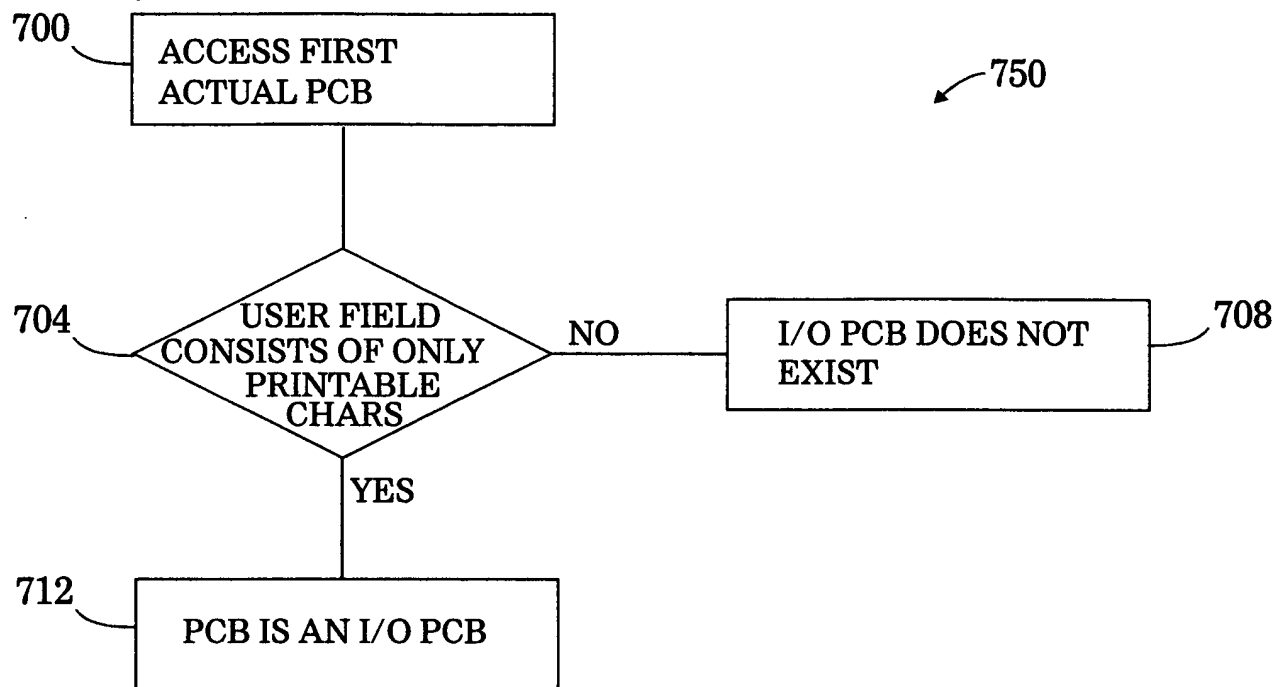


Fig. 10



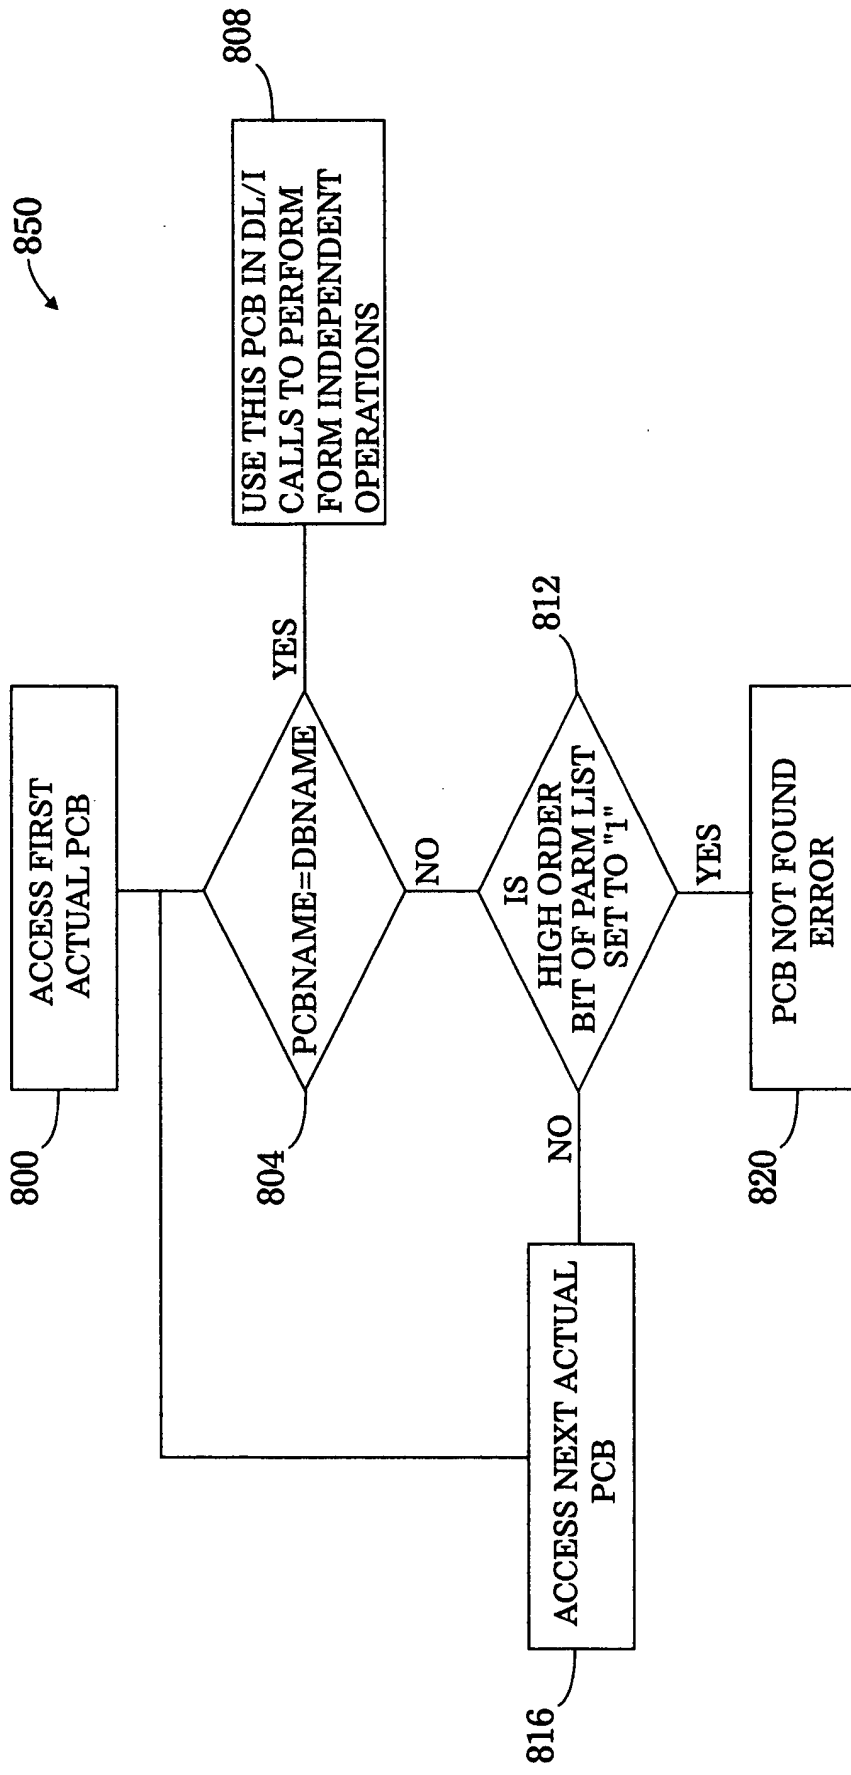


Fig. 11